

ARC SYSTEM


THE ARC IS A ROBUST, RAPIDLY DEPLOYABLE SOLAR POWERED CCTV TOWER WHICH PROVIDES RELIABLE, COST-EFFECTIVE SECURITY FOR ALL TYPES OF SITES.

WHAT DOES IT DO?

Provides 24/7 HD CCTV surveillance with intrusion detection alerts that can be streamed via a mobile network to any location or device, powered by solar.

STANDARD FEATURES

- Up to 3 static cameras and 1 Pan Tilt Zoom (PTZ) and options for thermal or bullet cameras
- Integrated smart analytics including intrusion detection and perimeter security
- PA horn for instant live or pre-recorded audio deterrents
- Out of hours alarm monitoring with pre-agreed escalation process
- Access to live and recorded video footage on mobile devices through an encrypted cloud-based viewing application
- Up to 30 days of recorded video footage
- 5m telescopic CCTV mast with no working from heights
- Integration into any Video Management System
- Remote system health monitoring and automatic alerts
- Designed and Manufactured in the UK

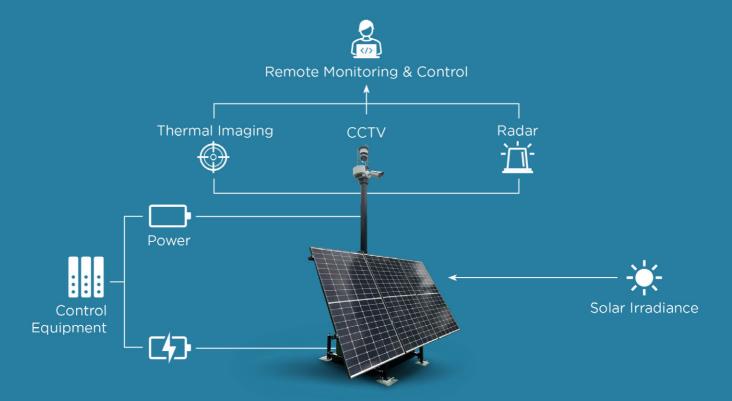

BENEFITS

BENEFITS OF ARC

- Green, reduce CO₂ emissions by up to 500kg per year
- Scalable, add more cameras as required including ANPR, thermals, and bullets
- Versatile deployment, moved around site as it develops, and requirements change
- Rapidly and easily deployable, cameras live and streaming in minutes
- Secure, lockable cabinet, tamper alerts, encrypted data, IP66 rated, anti-vandal collar
- Ruggedised, vandal resistant, built to last

"WE HAVE BEEN
EXTREMELY PLEASED
WITH THE SURVEILLANCE
UNITS PROVIDED BY
SUNSTONE SYSTEMS"

CONSTRUCTION MANAGER AT BALFOUR BEATTY



ARC SYSTEM OPTIONS



SECURITY OPTIONS

Smart Analytics

Our analytics transform video, audio, and other data into valuable insights you can act on instantly. We use AI to support data into triggers that let you respond appropriately to security and safety breaches as they occur. Our analytics options include:



Fence Guard detects and triggers an event when objects cross a predefined virtual line in the camera view.



Loitering Guard tracks moving objects and triggers an event if they've been in an area for too long.



Motion Guard detects and triggers an event when objects move within a predefined area in the camera view.



Video Motion detects and triggers an event when objects move within a predefined area in the camera view.




Perimeter Defender delivers physical access controls at the perimeter of your site.



Object Analytics detects and classifies humans and vehicles tailored to your surveillance needs.



Example Deployment: ARC System (Security Platform) deployed into each corner of the construction site. Each ARC has integrated CCTV Cameras and Radar which constantly sweeping the area and using analytics can detect intruders and alert your monitoring centre. They can issue an audio warning and inform the local security team.



5G Connectivity: CCTV Monitoring Station

DATASHEET

UNIT DIMENSIONS

Transport: H 2250mm W 1200mm D 1000mm Deployed: H 4500mm W 2100mm D1200mm Operating temperature:

-40°C to +60°C

Power: 680w solar panel array Power consumption: 20-32W Battery system: 200Ah Weight:

500kg

CABINET

Material: Painted steel, corrosion resistant

Features:

- Dual doors with dust/water seals
- Detachable solar array
- Concealed door hinges
- IP Rating: IP66 rated With purchase: Integrated foldable solar array bracket

TRIFIN PTZ BRACKET

Material: Painted steel, corrosion resistant Features:

- True 360 degree field of view
- Anti-wind loading design

TRANSPORT BASE

Material: Painted steel, corrosion resistant

Features:

- Integrated forklift slots, pump truck slots and lifting eyes
- Adjustable stabilising legs

IP CCTV CAMERA

Image sensor: 1/3" progressive scan CCD

Lens: 4.4-132mm, F1.4-4.6 Horizontal field of view:

62.9° - 2.2°

Vertical field of view: 37°-1.2° Zoom: 30x optical zoom and 12x

digital zoom

Operating temperature: -40°C to +60°C

Video Compression: H.264 (MPEG-4 Part 10/AVC)

SOLAR IP CCTV SYSTEM SOFTWARE

Features:

- Integrates with any IP CCTV Video Management Software (VMS)
- Remote system health status and power performance monitoring

OTHER

Certifications:

- EAC Certification
- CE Marking

British Standards:

- Eurocode 3 Design of steel structures, BS EN 1993-3-1:2006
- Eurocode 1- Actions on structures, BS EN 1991-1-4:2005
- Eurocode 3 Design of steel structures, BS EN 1993-3-2:2006

STANDARD MAST (OPTION A)

Material: Painted steel, corrosion resistant Features:

- Anti-wind loading design
- Demountable winch and stainless-steel wire

Deployed Height: 4.5 - 6m Servicing Height: 1.5m

TELESCOPIC MAST (OPTION B)

Only available with purchase, not rental

Material: Painted steel, corrosion resistant

Features:

- Anti-wind loading design
- Integrated nylon wheel winch system
- Demountable winch and stainless-steel wire

Deployed Height: 6m Servicing Height: 2.4m



Security

- CCTV Surveillance
- Smart Analytics
- Perimeter Detection
- Remote Monitoring



Rail

- Trackside Monitoring
- Set down Yard Security
- Passenger Surveillance & Monitoring



Telecoms

- Temporary Event WIFI Mobile Hotspot
- Point to Point Networks



Construction

- Site Security
- Health & Safety
- 24/7 Hotspot & WIFI



Oil & Gas

- Site Security
- Wellhead Telecoms
- Gas Detection



Highways

- Traffic Monitoring
- Average Speed Detection (TASCAR)
- Air Quality Monitoring



Sunstone House, Unit 1, Altira Business Park, The Boulevard, Herne Bay, Kent, CT6 6GZ United Kingdom

+44 (0)1227 369 470

www.sunstone-systems.com











